



FURY™

Assembly Instructions

Please follow these instructions to guide you through assembly only. For complete instructions on the recommended care and use of your tent, please refer to Owner's Manual at www.msrgear.com/tents/ownersmanual.

PACKAGE INCLUDES:

2 guy cords, 2 tensioners, 10 stakes, 1 repair sleeve




MOUNTAIN SAFETY RESEARCH®

© 2011 Cascade Designs, Inc.
4000 First Avenue South
Seattle, WA 98134 USA

1-800-531-9531 or 1-206-505-9500


1 PREPARE FOR SETUP

1. Spread tent out; stake out four corners tightly.

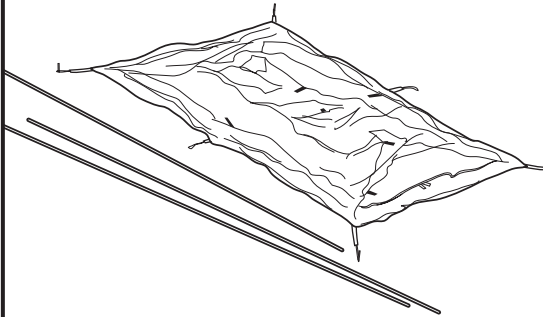


2 SETUP TENT

1. Insert the pole tips of an orange pole into the grommet of orange stake loops. Insert pole tips of remaining orange pole into grommet of red stake loops.
2. Following colored webbing, connect clips to poles.

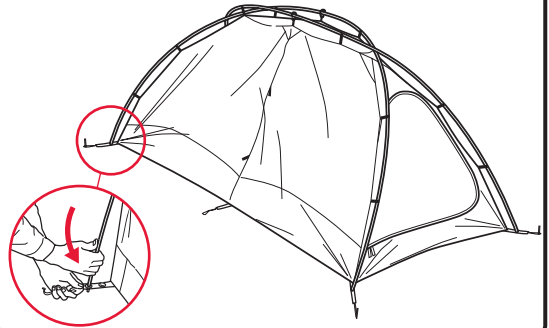


3 SETUP TENT

1. Place gray pole under orange poles and insert pole tips into grommets of gray stake loops.
2. Attach gray clips to gray pole.

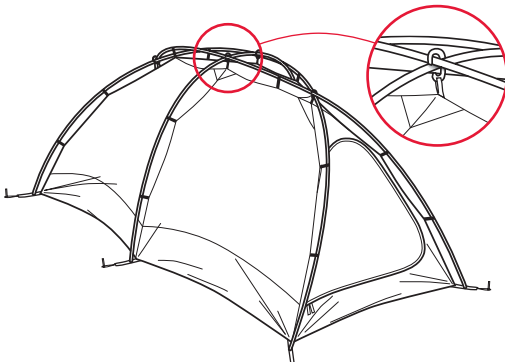

4 ATTACH RAINFLY

1. Thread silver vestibule pole into sleeve on underside of rainfly.
2. Lay rainfly over tent.
3. Insert vestibule pole tips into remaining grommets on either side of tent body door; clip and tighten buckles at all stake loops.

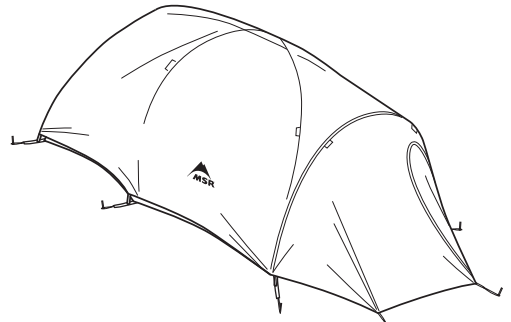

Note: All tents require staking. Unstaked tents are susceptible to blowing away. In some conditions, additional stakes and cord will be necessary. Re-adjustment of stakes and rainfly may be necessary to keep tent tight and weatherproof. Footprints help to keep your tent clean, dry, and protected from abrasion. Following these tips will prolong the life of your tent.